







VersaFill® 3

chemical dispensing system

The VersaFill 3 dilution and dispensing system offers employee safety, accurate diluting, and cost-control. Professional products must be used as specified in order to comply with safety statements and OSHA regulations. Over-proportioned chemicals equal a higher in-use cost, and in order to ensure efficacy against a specified organism, disinfectants must be properly diluted. Ensure safety and accuracy with the Spartan VersaFill 3 dilution and dispensing system.





Spartan Chemical Company, Inc. 1110 Spartan Drive Maumee, OH 43537 1-800-537-8990 www.spartanchemical.com

KEEP EMPLOYEES SAFE

Maintaining a clean and compliant facility puts your employees and/or contractors on the front lines of your cleaning operations. To minimize liability issues and maximize productivity, the VersaFill 3 makes employee safety simple.

- Safety-sealed, closed-system packaging with Clean on the Go®
- Color-coded product identification systems
- Bilingual procedures charts
- Customized product usage charts
- · Bilingual labeling systems

TOOLS & TRAINING AIDS:




ACCURATE DILUTION

The VersaFill 3 features AccuPro™ technology to control water pressure and ensure accurate dilution every time.

- Eliminates re-cleaning associated with improperly diluted chemicals
- Ensures proper PPM of actives with disinfectants and sanitizers
- Avoid leaks created with external pressure regulators
- Reduce costs associated with overdiluting chemicals

FITS:



SPECIFICATION DATA

Water Pressure Requirements: 25–80 psi *For optimal performance, use 40 psi*

Flow Rate

- Bucket fill: 3.5 gpm
- Bottle fill: 1 gpm

Fill Connections


- Bucket fill: Up to 4
- Bottle fill: Up to 4

Air gap model 967200 meets plumbing requirement ASSE 1055B and A112.1.2

E gap model 967100 meets plumbing requirement ASSE 1055B

Be sure to read all Directions, Precautionary and First Aid Statements on product labels before use of this or any Spartan product. If questions remain, consult your employer or a physician. Safety Data Sheets for all Spartan products are available from your authorized Spartan distributor or by visiting www.spartanchemical.com.

APPROXIMATE DILUTIONS AT 40 PSI FOR WATER-THIN PRODUCTS (1.0 CP)					
Tip Color	Orifice Size	Ratio/Ounces Per Gallon (per Educator Flow)			
		1 GPM		3.5 GPM	
No Tip	.187	3:1	42 oz	3.5:1	36 oz
Grey	.128	3:1	42 oz	4:1	32 oz
Black	.098	3:1	42 oz	4:1	32 oz
Beige	.070	4:1	32 oz	8:1	16 oz
Red	.052	5:1	25 oz	16:1	8 oz
White	.043	7:1	18 oz	20:1	6 oz
Blue	.040	8:1	16 oz	24:1	5 oz
Tan	.035	10:1	12 oz	30:1	4 oz
Green	.028	16:1	8 oz	45:1	3 oz
Orange	.025	20:1	6 oz	56:1	2.25 oz
Brown	.023	24:1	5 oz	64:1	2 oz
Yellow	.020	32:1	4 oz	90:1	1 oz
Aqua	.018	38:1	3 oz	128:1	1 oz
Purple	.014	64:1	2 oz	180:1	0.75 oz
Light Grey	.012	87:1	1.5 oz	256:1	0.5 oz
Pink	.010	128:1	1 oz	350:1	0.365 oz
Olive-Green	.008	256:1	0.5 oz	N/A	
Clear	Blank	N/A		N/A	

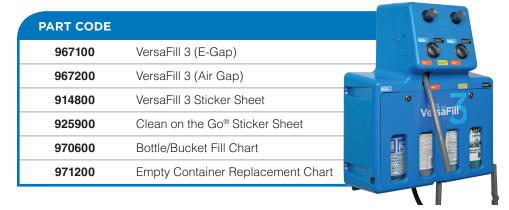





Distributed by:

Instructions are available in English, Spanish, and French.

GUARANTEE: Spartan's modern manufacturing and laboratory control insure uniform quality. If dissatisfied with performance of product, any unused portion may be returned for credit within one year of the date of manufacture. Use product as directed and read all precautionary statements.

